

74C068 SH P ... K3 NA

74C068 SH P 1X300 Cu2 K3 NA

Contact

Market information
industryprojects.business@nexans.com

Nexans Ref.: 10176141

EAN 13: 3427580463167

Low voltage cables CST 74C068 for nuclear power plants, 0.6/1kV halogen-free. These cables are intended to be installed outside the containment area (K1).

DESCRIPTION

Applications

These low voltage cables are used for lighting system power supply, engine power supply and solenoid valve power supply.

Design

Conductor:

Stranded bare copper or aluminium (class 2)

Insulation:

Cross-linked halogen free (SH)

Covering (optional):

Halogen free

Outer sheath:

Low smoke, zero halogen (LSZH)

Colour: Blue

Core identification

According to HD308 S2


Marking

NEXANS 279 Nber of cores & cross-section Cu/Al CST 74 C 068 00 K3 SH 0.6/1 (1.2) kV YYYY Manufacturing number + metric marking

Standard

IEC 60332-3-23(B)

Quality insurance according to RCC-E

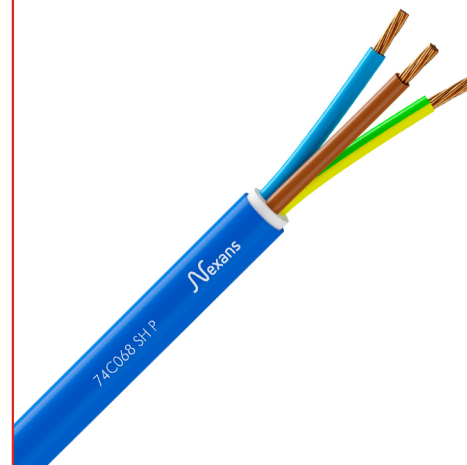

STANDARDS

International IEC 60228;
IEC 60332-3-23; IEC 60754-1;
IEC 61034-2

National NF C 32-070/C1



Halogen free
IEC 60754-1



Rated Voltage Uo/U (Um)
0.6/ 1 (1.2) kV



Fire retardant
NFC 32070 C1/IEC 60332-3-23(B)



Smoke density
EN/IEC 61034-2



Operating temp.
-20 - 60 °C



Max. conductor temp. in service
90 °C

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Nexans is indicative only and shall not be binding on Nexans or be treated as constituting a representation on the part of Nexans.

Generated 5/19/22 www.nexans.fr Page 1 / 2

74C068 SH P ... K3 NA

74C068 SH P 1X300 Cu2 K3 NA

Contact

Market information
industryprojects.business@nexans.com

CHARACTERISTICS

Construction characteristics

Conductor material	Plain copper
Type of conductor	Stranded, Class 2
Insulation	Halogen-free
Outer sheath	Halogen-free
Halogen free	IEC 60754-1
With Green/Yellow core	No

Dimensional characteristics

Conductor cross-section	300 mm ²
Number of cores	1
Conductor diameter	20.6 mm
Diameter over insulation	24.2 mm
Minimum outer diameter	30.8 mm
Maximum outer diameter	34.0 mm
Approximate weight	3389 kg/km

Electrical characteristics

Rated Voltage U _o /U (U _m)	0.6/ 1 (1.2) kV
---	-----------------

Usage characteristics

Fire retardant	NFC 32070 C1/IEC 60332-3-23(B)
Smoke density	EN/IEC 61034-2
Operating temperature, range	-20 - 60 °C
Max. conductor temperature in service	90 °C
Nuclear Classification	Class 1 E Non LOCA/K3

SELLING AND DELIVERY INFORMATION

Minimum bending radius:

- 8 x outer diameter
- To be doubled during laying operations



Halogen free
IEC 60754-1



Rated Voltage U_o/U (U_m)
0.6/ 1 (1.2) kV



Fire retardant
NFC 32070 C1/IEC 60332-3-23(B)



Smoke density
EN/IEC 61034-2



Operating temp.
-20 - 60 °C



Max. conductor temp. in service
90 °C

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Nexans is indicative only and shall not be binding on Nexans or be treated as constituting a representation on the part of Nexans.

Generated 5/19/22 www.nexans.fr Page 2 / 2